ViewSonic ViewBoard IFP6533-G ViewBoard® 65" 4K Interactive Display - Datasheet - ViewSonic Global

ViewSonic 🎎

VIEWBOARD ViewBoard IFP6533-G


Key Features

•Multi-tasking capabilities for enhanced lesson delivery
•Embrace simplicity and organization with the USB-C onecable solution, offering 65W of Power Delivery.
•Intuitive user interface and fast app launch for smooth operation
•Deverad by Android 11

•Powered by Android 11 Product **Description**



The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cuttingedge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

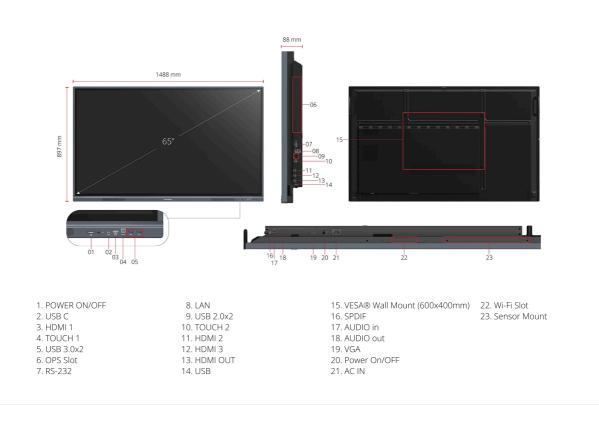

Visit Us

www.viewsonic.com

ViewSonic ViewBoard IFP6533-G ViewBoard® 65" 4K Interactive Display - Datasheet - ViewSonic Global

DISPLAY		EMBEDDED OS	
Panel Size:	65"	Android 11	
	TFT LCD Module with DLED	BUNDLE SOFTWARE	
Panel Type:	Backlight. IPS	Basic Annotation Software:	myViewBoard Whiteboard
Display Area (mm):	1428.48(H) × 803.52(V) (64.5" diagonal)	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional
Aspect Ratio:	16:9		Windows Slot-in PC)
Resolution:	UHD 3840x2160(Pixels)	Wireless Presentation:	myViewBoard Display
Colors:	1.07B colors	Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes
Brightness:	350 nits	SPECIAL FEATURES	
Contrast Ratio:	5000:1 (max. with DCR enabled)		(combine slot-in PC/Android/HDMI USB por
Response Time:	8ms	All-in-one USB port:	Front "SmartPort™ USB" to all channels.
Viewing Angles:	H=178, V=178	Simple LAN sharing between IFP	10/100M for Android & Slot
Backlight Life:	50,000 Hours (8 hours of use per day)	and slot-in device: Light Sensor:	PC Yes
Surface Treatment:	Hardness: 7H Anti-glare	POWER	
Orientation:	coating	Voltage:	100-240V AC
	Landscape	Consumption:	On:99W ; Off: ≤ 0.5W
	Quad-core ARM Cortex	ERGONOMICS	
Processor:	(A55*4)	Wall Mount (VESA®):	600*400
RAM:	8GB DDR4	OPERATING CONDITIONS	
Storage:	128 GB	Temperature (° C):	0°C to 40°C
олсн			20% ~ 80% RH non-
Type/ Tech:	Ultra Fine Touch Technology	Humidity:	condensing
Touch Point:	40 points touch	DIMENSIONS (W X H X D)	
NPUT		Physical (inch / mm):	1488 x 897 x 88 mm / 58.6 35.3 x 3.5 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	1628x1005x208 mm / 64.1 39.6x 8.2in
RGB / VGA:	x1	WEIGHT	
Audio:	x1	Net (lb / kg):	77.1lb/34.95kg
RS232:	x1	Gross (lb / kg):	98.5 lb/44.7kg
OPS:	x1 (Optional Intel Standard OPS)	REGULATIONS	
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BO & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS	
DUTPUT		PACKAGE CONTENTS	
HDMI:	HDMI 2.0 x1	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-00) Quick Start Guide + Compliance statement 6. RS232 adapter Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m	
Audio:	x1		
SPDIF:	x1		
AN		COMPATIBLE SLOT-IN PC	
RJ45:	x2	VPC2-O series/VPC2-O-1B series	VPC12-WPO-15/16
JSB			
Туре А:	USB3.0:Front x2, Rear x2; USB2.0 x1		
Туре В:	x2 (Rear x1 + Front x1)		
Туре С:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		
PEAKERS			
16W x 2			