ViewSonic ViewBoard IFP8633-G ViewBoard® 86" 4K Interactive Display - Datasheet - ViewSonic Global

## ViewSonic MiewBoard IFP8633-G


## Key Features

- Integrated with myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C onecable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



## Product **Description**

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cuttingedge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

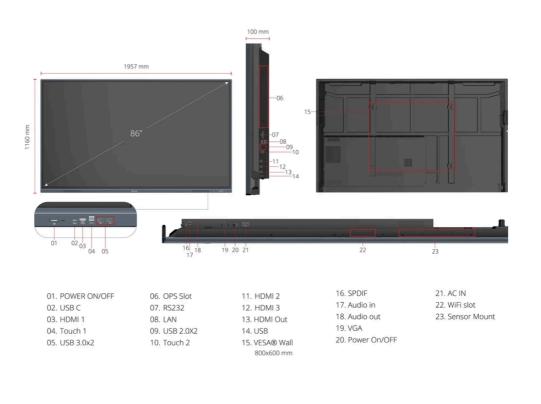

1. POWER ON/OFF 2. USB C 3. HDMI 1 8. LAN 9. USB 2.0x2 10. TOUCH 2 15. VESA® Wall Mount (800x600mm)22. Wi-Fi Slot16. SPDIF23. Sensor Mount17. AUDIO in

ViewSonic ViewBoard IFP8633-G ViewBoard® 86" 4K Interactive Display - Datasheet - ViewSonic Global

9 ViewSo	onic ViewBoard IFP8633-G ViewBoard®	86" 4K Interactive Display - Datashe	ViewSonic ViewBoard IFP8633-G ViewBoard® 86" 4K Interactive Display - Datasheet - ViewSonic Global			
<b>DISPLAY</b> 4. TOUCH 1 5. USB 3.0x2	11. HDMI 2 12. HDMI 3	EMBÉDDED OS				
Panel Size:	86"	Android 11				
Panel Type:	TFT LCD module with DLED	BUNDLE SOFTWARE				
Display Area (mm):	backlight, VA 1913.04(H) x 1083.96 (V)	Basic Annotation Software:	myViewBoard Whiteboard			
Aspect Ratio:	16:9	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional			
Resolution:		1.	Windows Slot-in PC)			
Colors:	1.07B colors	Wireless Presentation:	myViewBoard Display			
Brightness:	350 nits	Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes			
Contrast Ratio:	5000:1 (max. with DCR enabled)	SPECIAL FEATURES				
Response Time:	8ms	All in one USB port:	(combine slot-in PC/Android/HDMI USB port)			
Viewing Angles:	H=178, V=178		Front "SmartPort™ USB" to all channels.			
Backlight Life:	50,000 Hours (8 hours of use per day)	Simple LAN sharing between IFP and slot-in device:	10/100M for Android & Slot-in PC			
Surface Treatment:	Hardness: 7H Anti-glare	Light Sensor:	Yes			
	coating	POWER				
Orientation:	Landscape	Voltage:	100-240V AC			
PLATFORM	Quad-core ARM Cortex	Consumption:	On:154W ; Off: ≤ 0.5W			
Processor:	(A55*4)	ERGONOMICS				
RAM:	8GB DDR4	Wall Mount (VESA® ):	800*600			
Storage:	128 GB	OPERATING CONDITIONS				
тоисн		Temperature (° C):	0°C to 40°C			
Type/ Tech:	Ultra Fine Touch Technology	Humidity:	20% ~ 80% RH non- condensing			
Touch Point:	40 points touch	DIMENSIONS (W X H X D)				
INPUT		Physical (inch / mm):	1957 x 1160 x 100 mm / 77 x 45.7 x 3.9 in			
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	2110 x 1283 x 225 mm /83 x			
RGB / VGA:	x1	,	50.5 x 8.9 in			
Audio:	x1	WEIGHT Net (lb / kg):	129.1lb/58.55kg			
RS232:	x1	Gross (lb / kg):	167.3lb/75.9kg			
OPS:	x1 (Optional Intel Standard OPS)	REGULATIONS	107.01070.0Kg			
WiFi:	x1 (Optional VB-WIFI- 002/VB-WIFI-004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS				
OUTPUT						
HDMI:	HDMI 2.0 x1	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m				
Audio:	x1					
SPDIF:	x1					
LAN RJ45:	x2	COMPATIBLE SLOT-IN PC				
USB	Λ2	VPC2-O series/VPC2-O-1B series	s/VPC12-WPO-15/16			
Туре А:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1					
Туре В:	x2 (Front x1, Rear x 1)					
Туре С:	Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)					
SPEAKERS						
16W x 2						
TOP CAMERA PLATE						
Yes						