


Key Features

- 3rd generation laser phosphor technology with up to a 30,000-hour lifespan
- 5,000 ANSI Lumens
 offering bright images in
 any environment
- Up to 300" ultra large screen with lower costper-inch
- Compact size and light weight reducing cost of transportation and installation
- Installation flexibility: 1.3x optical zoom, H/V keystone, 360° projection, and portrait mode



Product **Description**

The LS740W belongs to ViewSonic's Luminous Superior series, a lamp-free high-brightness projector line up designed for commercial and educational spaces. With its adoption of the 3rd generation laser phosphor technology, it delivers 5,000 ANSI Lumens for up to 30,000 hours, ensuring bright and vivid images without lamp replacement. The lamp-free design offers an eco-friendly and cost-effective solution, while the projector's light weight and compact design reduces transportation costs. With up to 300" projection and high native contrast, it is well-suited for boardrooms, lecture halls, and public spaces. This projector features a 1.3x opticalzoom, H/V keystone, 4 corner adjustment, 360° projection, and a portrait mode for easy setup and versatile applications.

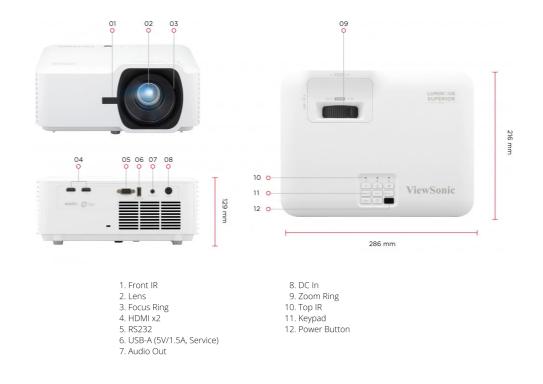

Visit Us

www.viewsonic.com

SPECIFICATION	(

SPECIFICATION		OTHERS	
Native Resolution:	1280x800		Power adaptor:
Brightness:	5000 (ANSI Lumens)	Power Supply Voltage:	Input: 100~240V Output: 19.5VDC /
Contrast Ratio:	3000000:1		11.79A
Display Color:	1.07 Billion Colors	Power Consumption:	Normal: 210W Standby: <0.5W
Light Source Type:	Laser Phosphor	Operating Temperature:	0~40°C
Light Source Life (hours) with Normal Mode:	20000	Carton:	Brown
Light Source Life (hours) with		Net Weight:	3.00kg
SuperEco Mode:			4.70kg
Lens:	F=2.43-2.78, f=16.90- 21.61mm	Dimensions (WxDxH) with Adjustment Foot:	286x216x129mm
Projection Offset:	124%+/-10%	Packing Dimensions:	400x280x155mm
Throw Ratio:	1.18-1.54		English, French,
Optical Zoom:	1.3X		Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech,
Digital Zoom:	0.8x-2.0x		
Image Size:	30"-300" OSD Language:		T-Chinese, S- Chinese,Japanese,
Throw Distance:	0.77-9.98m (100"@2.54m)		Turkish, Portuguese, Finnish, Indonesian, Arabic, Vietnamese, Hungarian, Norsk, total 23 languages
Keystone:	H:+/-30° , V:+/-30°		
Audible Noise (Normal):	30dB		English, S-Chinese, T-
Audible Noise (Eco):	24dB		Chinese, Indonesian, Finish, French,
Input Lag:	49.5ms		German, Italian, Japanese, Korean,
Resolution Support:	VGA(640 x 480) to WUXGA RB(1920 x 1200) *RB-Reduced Blanking	User Guide Language:	Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	languages STANDARD ACCESSORY	
Horizontal Frequency:	15K-102KHz	Power Cord:	1
Vertical Scan Rate:	24-120Hz	Remote Control:	1
INPUT		QSG:	Yes
HDMI:	2 (HDMI 1.4/ HDCP 1.4)	Warranty Card:	Yes (CN Only)
OUTPUT	,	OPTIONAL ACCESSORY	
Audio-out (3.5mm):	1	Wall/Ceiling Mount:	PJ-WMK-007
Speaker:	15W	Carry Bag:	PJ-CASE-008
USB Type A (Power):	1 (5V/1.5A)		
CONTROL			
RS232 (DB 9-pin male):	1		
USB Type A (Services):	1 (share with USB A Output)		